


3YOLLU PASLANMAZ KÜRESEL VANALAR \\ 3 WAYS SS BALL VALVES

Özellikler	Features
1000PSI/PN63	
Redüksiyon Geçiş	Reduce Bore
Hassas Döküm	Investment Casting
Sızdırmaz Mil Tasarımı	Blow-out Proof Stem
ISO5211	
PED97/23/PE (CE0035) Approved	
Anti Statik Ürün (Opsiyonel)	Anti Static Device (Optional)
L veya T Port	L or T Port
Diş Standartı ASME B1.20.1 BS21. DIN2999/259 ISO228-1 JIS B0203 ISO7/1	Thread ASME B1.20.1 BS21. DIN2999/259 ISO228-1 JIS B0203 ISO7/1
Muayene Test Stand. API598, EN12266	Inspection Testing API598, EN12266



No	Parça	Designation	Adet Qty	Malzeme Material
1	Gövde	Body	1	304SS / 316SS
2	Gövde	Body	1	304SS / 316SS
3	Gövde	Body	1	304SS / 316SS
4	Küre	Ball	1	304SS / 316SS
5	Küre Sızdırmazlık	Ball Seat	4	R-PTFE
6	Mil	Stem	1	304SS / 316SS
7	Baskı Pulu	Thrust Washer	1	PTFE
8	Mil Burcu	Stem Packing	1	PTFE
9	Salmastra Somunu	Gland Nut	1	304SS
10	Yaylı Rondela	Spring Washer	2	304SS
11	Somun	Nut	2	304SS
12	Kol Plastiği	Handle Sleeve	1	PVC
13	Kol	Handle	1	304SS
14	Tozluk	Washer	1	304SS / 316SS
15	Baskı Pulu	Thrust Washer	1	PTFE
16	O-ring	O-ring	1	FKM
17	Bağlantı Contası	Joint Gasket	1	PTFE

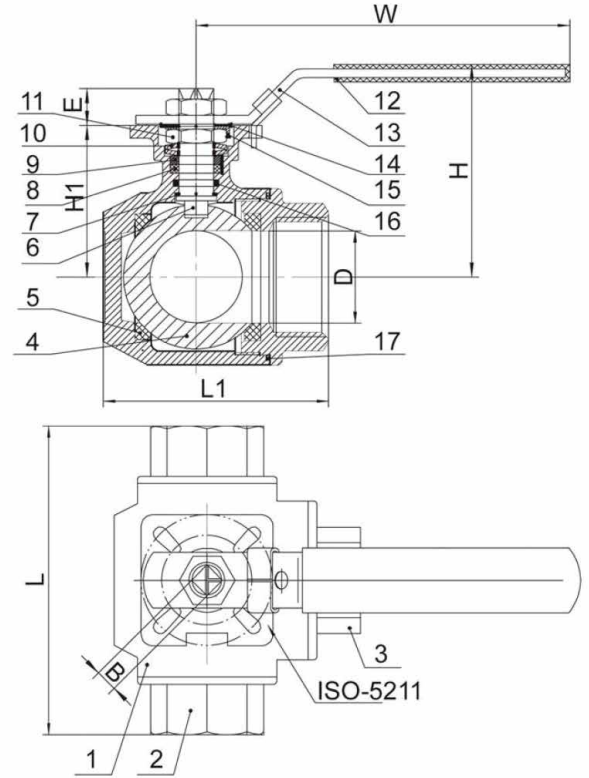

DN	ΦD	W	L±2	L1±2	H	B _{0.07}	E±1	ISO5211	H1
1/4"	9	139	79	64	73	9	9	F04/03	42
3/8"	11	139	79	64	73	9	9	F04/03	42
1/2"	12.5	139	79	64	73	9	9	F04/03	42
3/4"	16	139	83	68	80	9	9	F04/03	49
1"	20	160	104	82	95	11	11	F05/04	59.5
1-1/4"	25	160	120	90	98	11	11	F05/04	63
1-1/2"	32	185	126	106	110	14	14	F07/05	73.5
2"	38	185	147	123	119	14	14	F07/05	82.8



Merkez : Başakşehir / İstanbul
İmalat ve Şube : Gebze / Kocaeli



+90 212 243 09 75
+90 262 644 43 08



info@altigen.com.tr



www.altigen.com.tr